



Uniclass L773	EPIC N57
CI/SfB	
20060384	March 2009

Uni-16[®] Horizontal Lifeline[®]
Synthetic Cable System





Uni-16[®] Horizontal Lifeline[®] synthetic cable system




working safely at heights

A workplace is considered to be at height if a person could be injured when falling from it, even if it is at or below ground level. This means that work place risks need to be carefully assessed and appropriate and proportionate control measures implemented in order to mitigate such risks. The Uni-16 Horizontal Lifeline Synthetic Cable System combined with good management controls provides a simple, yet comprehensive solution that will ensure compliance with current regulations in many circumstances.

The Uni-16 product is well suited to special projects, refurbishments and can also be used for a wide range of industrial safety applications. The product is high quality, whilst providing excellent

value for money. In typical circumstances, the product can span up to 30m between support brackets. Uni-16 offers excellent functionality through its free flowing bypass capability and can navigate corners and contours in building designs. Minimal moving parts and high grade materials ensure long life expectancy, low cost of ownership and add up to a sound investment. The system can be fitted to many types of structure and can also support multiple workers for both fall arrest and work restraint applications. Detailed information to ensure safe system design and integration is provided by our comprehensive Uniline for Windows software programme and further enhanced by a comprehensive installation network.



contents

working safely at heights	02
features and benefits	03
components	04

for more information about our range of equipment visit our website at www.unilinesafety.com





features and benefits

- a unique 16mm synthetic cable system for permanent fall protection applications, offering excellent freedom of movement
- spans of up to 30m typically between intermediate supports, saving installation time and cost
- navigates corners and building contours
- excellent energy absorbing capability
- electro-polished components provide long-term corrosion resistance**
- water resistant and does not rot
- UV and ozone resistant
- non-abrasive
- system performance calculated using bespoke design software
- conforms to EN795 Class C
- CE Marked

**some aggressive environments can cause corrosion and discolouration of stainless steel

best for industry, construction and specialist applications

03

Uniline system tensioner – 316 & 304 stainless steel with tension indicator disc and ability to lengthen or shorten the system



UGT0100A

Uniline 16mm synthetic cable constructed from polyester, latex and neoprene with a breaking strength of 76kN. Available in grey, orange or black



UCB/G/O/0100A

Uniline intermediate bracket – 316 stainless steel, electropolished. Variable positioning available to suit a range of applications, re-orientates load in the event of a fall



UI0100A



UP0112A

Wall Anchor Plate – 316 stainless steel, electro-polished. 50kN min breaking strength




UE0100A

Unieye end anchorage connector – 316 stainless steel, electro-polished, serial numbered – 67kN min breaking strength



UA0600

Inline Force Management Energy Absorber – 316 stainless steel, electro-polished

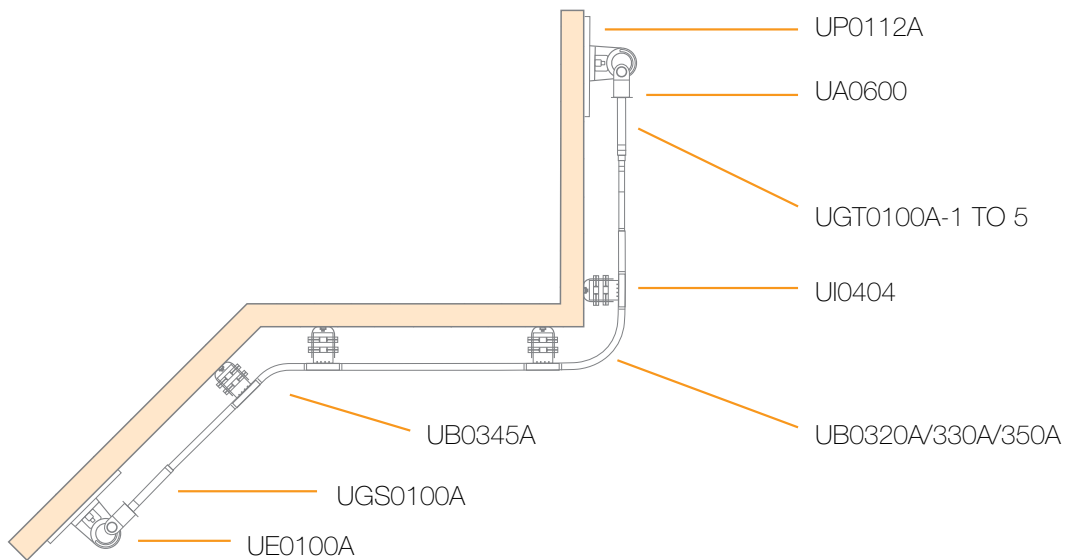

Uniline 90 and 45 degree corners. 316 stainless steel, electro-polished. Other angles achieved using bespoke fabrications

Uniline swage end – 316 stainless steel

Unigrab Attachment Device weighs only 0.48kg and fits in the palm of your hand. Can be attached at any point along the system. 316 stainless steel, electro-polished and serial numbered



UB0320A/330A/345A/350A



UGS0100A



UG0100A

